



XE75G

Kubota V2607

Engine Model

42.4 kW

Rated Power

7700 kg

Operating Weight

0.33 m³

Bucket Capacity



EXCAVATOR

MORE EFFICIENT AND RELIABLE WITH LESS FUEL CONSUMPTION

APPLICATIONS

Widely used in hydropower, transportation, municipal, landscaping, farmland, and pipeline constructions.

FEATURES

Electronic control pump has accurate flow matching, and it's easy to handle various conditions with E/P/B intelligent modes; High comfort due to car level NVH optimization, low noise, wraparound sun shades, and auto AC with std fresh air system; Upgraded main pump is less jerky with lower pressure loss for compound movements.



Head Office Gaya Makmur Putra

Jl. Lingkar Luar Barat No.3 Rawa Buaya - Cengkareng

Jakarta Barat - Indonesia 11740

Telp : (62 21) 5828 799

Email : info@gmtractors.net

Website : www.gmtractors.net



SPECIFICATION

EXCAVATOR XE75G

Item	Specification
Operating weight	7700 Including operator (75 kg) Contains 90 % fuel
Engine	
Model	Kubota V2607
Rated power/rpm	42.4/2000 kW/rpm
Direct injection	√
4-stroke	√
Water-cooled	√
Turbocharged	√
Stroke	110 mm
Cylinder bore	87 mm
Number of cylinders	4
Maximum torque/rpm	222.5/1400-1800 N·m/rpm
Displacement	2.615 L
Main Performance	
Travel speed (H/L)	4.3/2.5 km/h
Swing speed	11 r/min
Maximum swing torque	23 kN.m
Gradeability	35° (70%)
Ground specific pressure	33.5 kpa
Bucket digging force (SAE)	54 kN
Bucket digging force (ISO)	57 kN
Arm digging force (SAE)	35 kN
Arm digging force (ISO)	38 kN
Maximum traction force	68.3
Track	
Standard track shoe width	450 mm
Number of track shoes (per side)	39
Number of track roller (per side)	5
Number of track carrier roller (per side)	1

Hydraulic System	
Main pump	Plunger pump
Maximum flow rate of main system	163.8 L/min
Main system pressure	28.4 Mpa
Pilot system pressure	3.7 ±0.2 Mpa
Travel system pressure	28.4 Mpa
Swing system pressure	23.5 Mpa
Oil Capacity	
Fuel tank capacity	170 L
Hydraulic oil tank capacity	76 L

Machine Dimension		Working Range	
A. Overall height	2779.5 mm	Length of boom	3720 mm
B. Overall Length	6185 mm	Length of arm	1622 mm
C. Overall width	2265 mm	A. Maximum reach	6260 mm
D. Upper structure width	2260 mm	B. Maximum reach at GRP	6070 mm
E. Chassis width (extended/retracted)	2250 mm	C. Maximum digging height	7085 mm
F. Track length	2825 mm	D. Maximum unloading height	5160 mm
G. Track height	696 mm	E. Minimum unloading height	2476 mm
H. Standard track shoe width	450 mm	F. 6 ft. level floor digging depth	3628 mm
I. Track wheelbase	2195 mm	G. Maximum vertical digging depth	2960 mm
J. Track gauge (extended/retracted)	1800 mm	H. Maximum digging depth	4020 mm
K. Counterweight ground clearance	813 mm	I. Minimum swing radius	1818 mm
L. Minimum ground clearance	385 mm	J. Maximum lifting height of dozer blade	440 mm
M. Tail swing radius	1840 mm	K. Max. cutting depth of dozer blade	445 mm
N. Dozer blade height	385 mm		
O. Dozer blade width (unfolded/folded)	2250 mm		
P. Hood height	1800 mm		

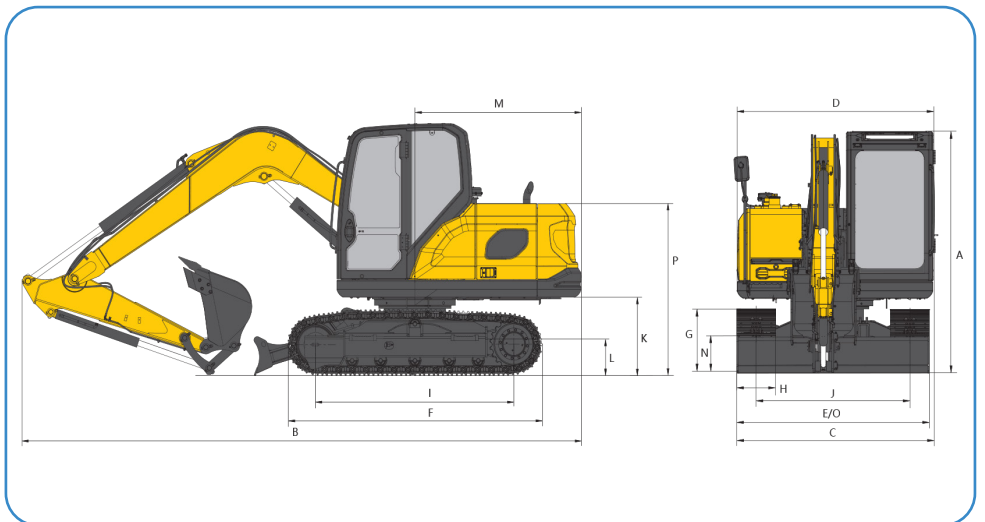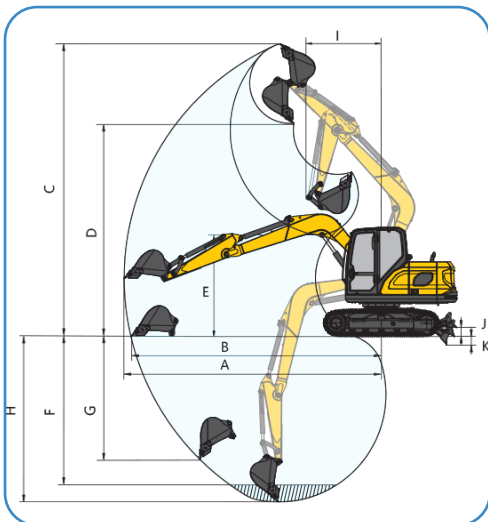

THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

Networking

Jakarta | Semarang | Surabaya | Medan | Padang | Pekanbaru | Jambi | Palembang | Batam | Balikpapan | Banjarmasin | Makassar | Kendari | Manado
Samarinda | Pontianak | Sampit | Denpasar | Kupang